KL60SWPXX-R







Advantages:

- UL, DLC certificate;
- ➤ IP65 Internal driver,Input voltage 100-277Vac;
- No UV or IR in the beam;
- Easy to install and operate;
- Energy saving, long lifespan;
- Instant start, NO flickering, NO humming;
- Green and eco-friendly without mercury;

Technical Charactesitics

 Color Temp:
 4K, 4K5, 5K
 LED Quantity
 210 PCS

 CRI
 >80
 LED Type
 0.5W

 $\begin{array}{ccc} \text{Lumen} & & \text{6600-7200LM} & & \text{Housing} & \text{Aluminum(ADC12) +PC} \\ & & \text{Dimensions} & 360.5x235x194\text{mm} \end{array}$

Input Power 60W
Viewing Angle 110°

Input Voltage 100-277Vac 50/60Hz

PF ≥0.9

Driver Model China Brand Driver

Waterproof Rating Wet (IP 65)

Application:

- > entrance lighting, courtyard lighting;
- Industrial lighting, Outdoor landscape lighting;
- Building, The hotel;
- > Wall lighting area and so on.

Housing Color: Bronze

Technical Specifications

Listings

UL Listing:


UL code: E473338

DLC Listed

IP65: Suitable for wet locations



Dimensions



Operating conditions

Operating temperatures:

-20°C TO 45°C

Operating Humidity:

20%-90% RH

Storage Temperature

-30 $^{\circ}$ C TO 80 $^{\circ}$ C Storage Humidity:

10%-95% RH

Application:

Indoor/Outdoor

Others


Warranty time: 5 years

Notice for Users

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

KL60SWPXX-R



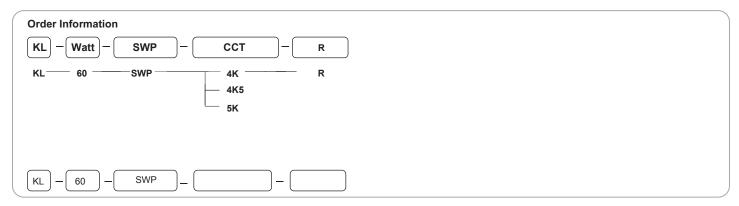

Package

Lamps Net Weight: 3.4kg / pc

	Size	Qty/Carton	Weight/Carton
Cardboard	400x300x240mm	1	4.6 KG



