

# KL120SRKPXX



## Advantages:

- UL DLC certificate
- PHILIPS Chip, SUNON fan
- High CRI
- Mean Well IP65 driver
- Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long service life
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

## Technical Characteristics

Color Temp:	4K, 4K5, 5K	LED quantity	138pcs
Lumen	12000-16200LM		
Input Power	120W		
Viewing Angle	120°		
Input Voltage	120V AC		
CRI	>80		
PFC	>0.9		
Waterproof Rating	IP40		
Equivalent	900W incandescent / 300W CFL		

## Application:

Outdoor Pole/ Arm-mounted Area and Roadway Luminaires  
High-bay Luminaires for Commercial and Industrial Buildings

## Technical Specifications

### Listings

UL listed

DLC Listed

IP40 Waterproof rating



### Others

#### Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

## Operating conditions

### Operating temperatures:

-20°C TO 45°C

### Operating Humidity:

20%-90% RH

### Storage Temperature

-30°C TO 80°C


### Storage Humidity:

10%- 90% RH

### Application:

Outdoor

## Dimensions

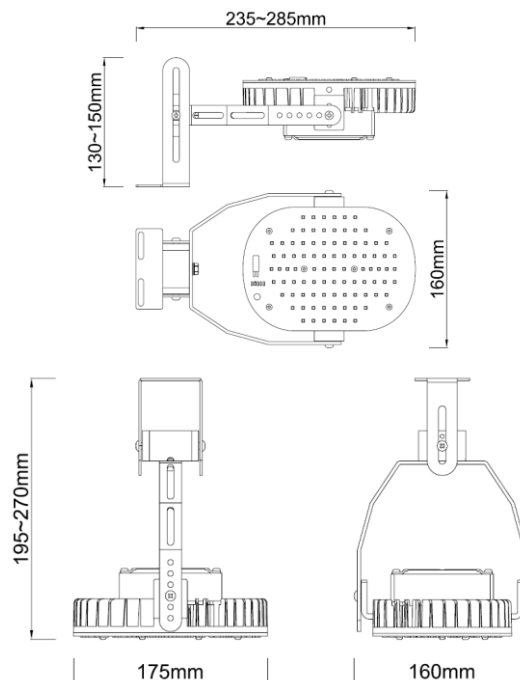

# KL120SRKPXX

## Order Information

KL – WATT – SRKP – Color Temp

KL — 120 — SRKP — 4K  
 5K

KL – 120 – SRKP –

## Packaging Information

Lamps Net Weight: 2.3 Kg/PC

	Size	Qty/ Carton	Weight/ Carton
Inner box	290x250x130mm	1	2.9 kg
outer box	530x310x300mm	4	12.6 kg

