


# KL40CL-B2E XX

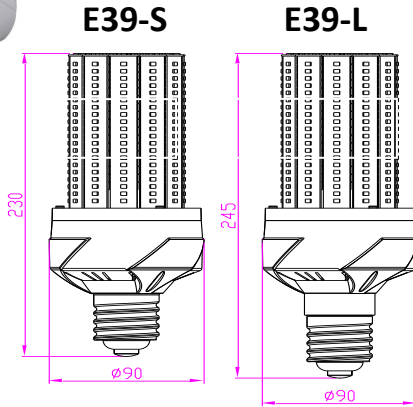

- **E39-S: Short Plastic Housing**
- **E39-L: Longer Plastic Housing**

### Advantages:

- UL, DLC certificate
- E39 lamp base
- 360 Degree lighting, high CRI
- Long, or short plastic housing
- Large heat sink, good heat dissipation
- Direct replacement for Metal Halide, Easy to install

### Technical Characteristics

Color Temp:	4K, 4K5, 5K, 5K7	LED Quantity	280 pcs.
CRI	>80	Housing	PC+AL
Lumen	4300-4600 LM		
Input Power	40W		
Viewing Angle	360°		
Input Voltage	100-277Vac 50/60HZ		
PFC	>0.9		
Light efficacy	108-115 LM/W		
Waterproof Rating	IP40		
Equivalent	80W CFL, 150W MHL/HPS/HID		

### Application:

Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B)

Housing Color: White

### Technical Specifications

#### Listings

#### UL Listing:

UL code: E472587

#### DLC Listed

IP40: Water proof rating



#### Others

#### Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. UFO High Bay installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

### Operating conditions

#### Operating temperatures:

-20°C TO 45°C

#### Operating Humidity:

20%-90% RH

#### Storage Temperature

-30°C TO 80°C

#### Storage Humidity:

10%- 95% RH

#### Application:

Outdoor/Indoor

# KL40CL-B2E XX



## Order Information

KL - Watt - CL - B2E - Color Temp

KL — 40 — CL — B2E — 
 

- 4K
- 4K5
- 5K
- 5K7

KL - 40 - CL - B2E -  

## Package

	Size (E39-S)	Size (E39-L)	Qty/ Carton	Net Weight/ Carton	Gross Weight/ Carton
Inner box	260x120x120 MM	280x120x120 MM	1 PC	0.36 KG	0.51 KG
Outer box	495x375x275 MM	495x375x295 MM	12 PCS	4.4 KG	7.3 KG

