


KL40CRN-B1E XX

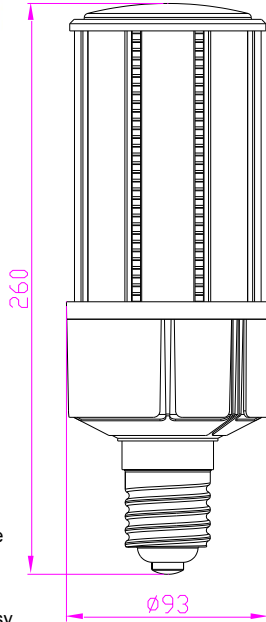

Advantages:

- UL, DLC certificate
- E39 lamp base
- 360 Degree lighting, high CRI
- IP64 Waterproof Rating
- Long, or short plasting housing
- New style and high efficient wide-range input.
- Large heat sink, good heat dissipation
- Direct replacemnt for Metal Halide, Easy to install
- Fits many different fixtures to replace traditional lamps.

Technical Characteristics

| | | | |
|-------------------|---------------------------|--------------|----------|
| Color Temp: | 4K, 4K5, 5K, 5K7 | LED Quantity | 280 pcs. |
| CRI | >80 | Housing | PC+AL |
| Lumen | 4300-4600 LM | | |
| Input Power | 40W | | |
| Viewing Angle | 360° | | |
| Input Voltage | 100-277Vac 50/60HZ | | |
| PFC | >0.9 | | |
| Light efficacy | 108-115 LM/W | | |
| Waterproof Rating | IP64 | | |
| Equivalent | 80W CFL, 150W MHL/HPS/HID | | |

Application:

Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B)

Housing Color: White

Technical Specifications

Listings

UL Listing:

UL code: E472587

DLC Listed

IP64: Suitable for wet locations



Others

Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. UFO High Bay installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

Operating conditions

Operating temperatures:

-20°C TO 45°C

Operating Humidity:

20%-90% RH

Storage Temperature

-30°C TO 80°C

Storage Humidity:

10%- 95% RH

Application:

Outdoor/Indoor

KL40CRN-B1E XX



Order Information

KL - Watt - CRN - B1E - Color Temp

KL — 40 — CRN — B1E —

- 4K
- 4K5
- 5K
- 5K7

KL - 40 - CRN - B1E -

Package

| | Size | Qty/ Carton | Net Weight/ Carton | Gross Weight/ Carton |
|-----------|----------------|-------------|--------------------|----------------------|
| Inner box | 290x120x120 MM | 1 PC | 0.52 KG | 0.67 KG |
| Outer box | 495x380x310 MM | 12 PCS | 6.3 KG | 9.2 KG |

