


# KLBR25STPXX24

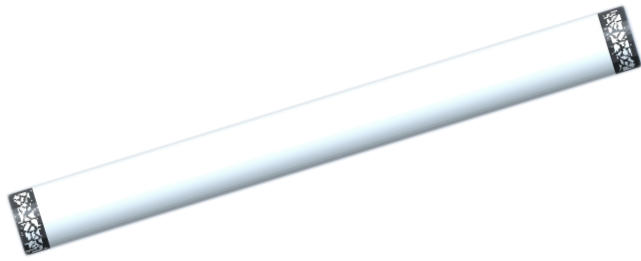

## Technical characteristics

Color Temp:	30K, 40K, 50K	Housing	Steel base with White Powder Coating
CRI	>80		
Lumen	2600LM		
Input Power	25W		
Beam Angle	116.5°		
Input Voltage	100-200Vac		
PFC	>90		
Light efficacy	100 lumen/watt		
Waterproof rating	IP20		

## Advantage


- Easy installation to save labor cost.
- High lumen efficacy to save energy.
- ETL & DLC
- 50000h long life time, 5 years warranty term.

## Application

Luminaires for Ambient Lighting of Interior Commercial Spaces  
Vanity Lights

### Dimensions

24"L x 5"W x 3.28"H (609.8x127x83.69mm)

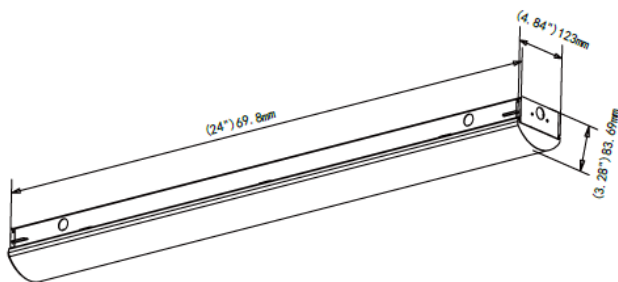

### Operating conditions:

Operating Temperature	-20°C TO 55°C
Operating Humidity	20%- 90% RH
Storage Temperature	-30°C TO 80°C
Application	Indoor
Storage Humidity	10%- 95%RH

### Order Information


<input type="text" value="KL"/>	-	<input type="text" value="BR"/>	-	<input type="text" value="WATT"/>	-	<input type="text" value="STP"/>	-	<input type="text" value="CCT"/>	-	<input type="text" value="Size"/>
KL		BR		25		STP		30K: 4000K 40K: 4500K 50K: 5000K		24"

<input type="text" value="KL"/>	-	<input type="text" value="BR"/>	-	<input type="text" value="25"/>	-	<input type="text" value="STP"/>	-	<input type="text"/>	-	<input type="text"/>
---------------------------------	---	---------------------------------	---	---------------------------------	---	----------------------------------	---	----------------------	---	----------------------


# KLBR25STPXX24

## Packing Information

1 pcs/CTN G.W : 2.2 kg Dimension : 24.4 x 5.3 x 3.7 inch (620x134.62x93.98mm)

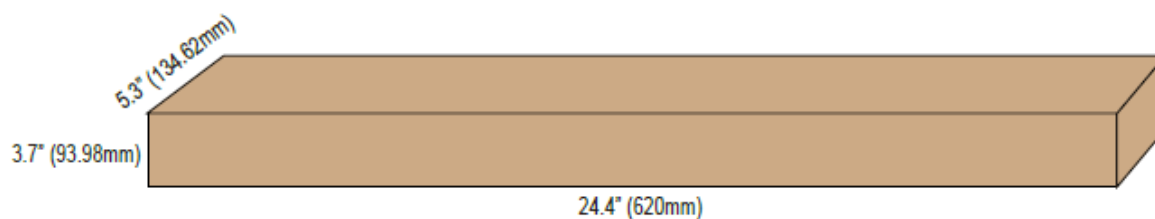

## Accessories (Optional)



Part 1



Part 2



Part 3



Part 4



Part 5



Part 6



Part 7