## KLBR80W277C5K





Driver Info		LED Info	
Туре:	Constant Current	Watts:	80W
100-277Vac:	Yes	Color Temp:	5000K
277-480Vav:	Not	Color Accuracy:	70CRI
Input Watts:	80W	L70 Lifespan:	50000
Efficiency:	88%	Lumens:	10400
		Efficacy:	130LPW

Suitable for wet location and operation in anbient not exceeding 40 °C(104  $\mathbb F$ ) Products are not intended for use in environments containing airbornecorrosive airborne corrsive agents such as chemical.

Color: White

Weight: 9.6lbs(4.3Kg)

.....

## FEATURES

- Description: 80W LED Parking Garage Canopy
- Universal 100-277V
- Mercury Free: no UV
- Heavy-duty cast aluminum housing; rust and corrosion proof;polyester powder coating
- 4KV surge protector inside of power supply
- IES/LM79/LM80 data available
- 5 Year Limited Warranty
- Mounting: Wall mounting
- Application: yard, dock, backyard, barns, farms, alleyways, roadway, parking lots, sidewalk, porch, building wall, etc.

### **SPECIFICATION**

#### **General Performance**

Input Wattage: 80W, Lumens: 10400, Efficacy: 130LPW, Input Voltage: 100-277V/50-60HZ, CRI: >70, CCT: 5000K, Power Factor: ≥0.9, THD: ≤20%, Driver Type: Constant Current / Class 1, Surge Protector: NO, Luminaire Life: 50000hrs;

#### Physical


Dimension:  $\phi$ 11.4"x3.13"( $\phi$ 290x79.5mm), Weight: 9.6 lbs(4.3Kg);


#### **Operation Condition**

Operating Temperature: -4 F ~+104 F (-20 C -40 C), Humidity: ≤95%;

### Certificate

Certification: ETL/cETL,DLC4.2, Environment: Suitable for Wet Location, Material: Rohs compliant.

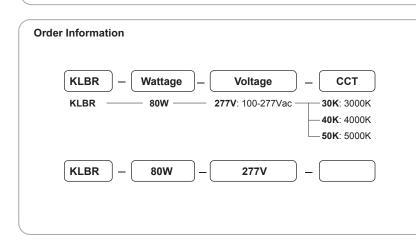

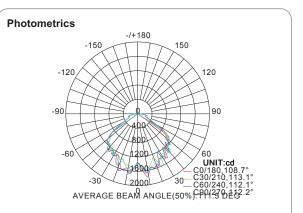



### CONSTRUCTION

- Heavy-duty cast aluminum housing; rust and corrosion proof;polyester powder coating
- Diffusor: High light transmittance & Polycarbonate with UV
- LEDs: Top grade LED, high-output,long-life;
  Heat Sink:Aluminium sink attached to the housing directly to reduce LED heats and add to life
- LED Driver: IP65/ Constant current
- Finish: Bronze finish. Environmentally friendly polyester powder coatings.

# KLBR80W277C5K



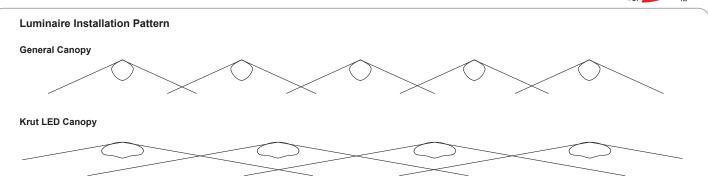

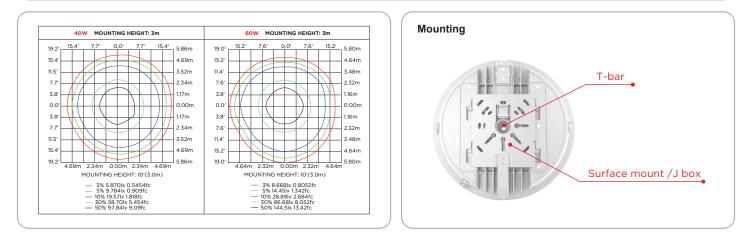

## **Packaging Information**

1pcs/CTN G.W.:4.3 kg Dimension: 25"L x 12.7"H x 15"W (635mmx323mmx382mm)

